


Fittings with short Spigot

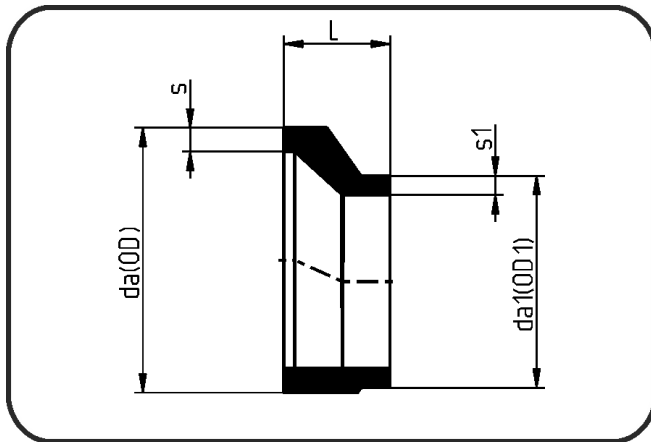

Code: 319

- Reducer excentric
- short spigot
- machined
- **Butt-welding**
- **PE 100-RC black**

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
400/225	70.319.4022.11	400/225 SDR11 ISO S-5	400	225	36,3	250	20,5	11.20
400/250	70.319.4025.11	400/250 SDR11 ISO S-5	400	250	36,3	230	22,7	11.60
400/315	70.319.4031.11	400/315 SDR11 ISO S-5	400	315	36,3	190	28,6	8.60
400/355	70.319.4035.11	400/355 SDR11 ISO S-5	400	355	36,3	170	32,2	5.90
450/315	70.319.4531.11	450/315 SDR11 ISO S-5	450	315	40,9	235	28,6	14.70
450/400	70.319.4540.11	450/400 SDR11 ISO S-5	450	400	40,9	180	36,3	10.00
500/315	70.319.5031.11	500/315 SDR11 ISO S-5	500	315	45,4	270	28,6	21.80
500/400	70.319.5040.11	500/400 SDR11 ISO S-5	500	400	45,4	200	36,3	15.00
500/450	70.319.5045.11	500/450 SDR11 ISO S-5	500	450	45,4	190	40,9	16.20
560/500	70.319.5650.11	560/500 SDR11 ISO S-5	560	500	50,8	210	45,4	19.00
630/450	70.319.6345.11	630/450 SDR11 ISO S-5	630	450	57,2	300	40,9	37.00
630/500	70.319.6350.11	630/500 SDR11 ISO S-5	630	500	57,2	300	45,4	30.20
630/560	70.319.6356.11	630/560 SDR11 ISO S-5	630	560	57,2	340	50,8	25.00