


Sweep Bends

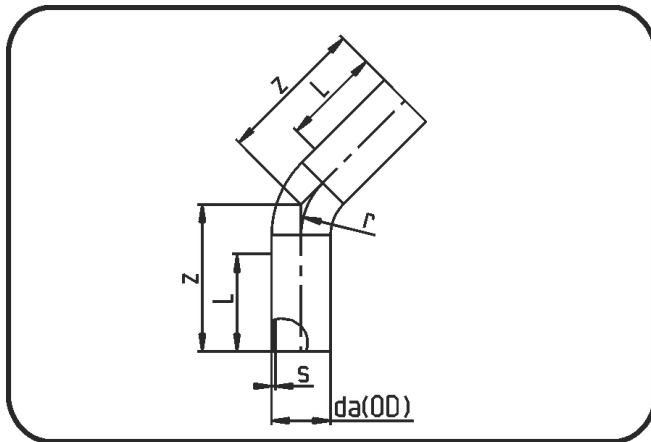

Code: 397

- Sweep Bend 45°
- radius 1.5 x OD
- formed out of pipe
- **Butt + E-fusion-welding**
- **PE 100-RC black**

** On request. Angle fixations are recommended for transport and storage at high temperatures (on request).

Dimension	Code	Detail	da(OD) mm	s mm	z mm	r mm	L mm	Weight
90	70.397.0090.09	90 SDR9 ISO S-4 20 bar	90	10,1	220	135	150	1.30
110	70.397.0110.09	110 SDR9 ISO S-4 20 bar	110	12,3	340	165	150	2.10
125	70.397.0125.09	125 SDR9 ISO S-4 20 bar	125	14	260	188	150	3.67
140	70.397.0140.09	140 SDR9 ISO S-4 20 bar	140	15,7	270	210	150	4.75
160	70.397.0160.09	160 SDR9 ISO S-4 20 bar	160	17,9	425	240	150	5.63
180	70.397.0180.09	180 SDR9 ISO S-4 20 bar	180	20,1	350	270	150	8.99
200	70.397.0200.09	200 SDR9 ISO S-4 20 bar	200	22,4	360	300	150	9.20
225	70.397.0225.09	225 SDR9 ISO S-4 20 bar	225	25,2	525	338	150	12.70
250	70.397.0250.09	250 SDR9 ISO S-4 20 bar	250	27,9	530	375	250	19.50
280	70.397.0280.09	280 SDR9 ISO S-4 20 bar	280	31,3	550	420	250	26.64
315	70.397.0315.09	315 SDR9 ISO S-4 20 bar	315	35,2	710	473	450	34.80
355	70.397.0355.09	355 SDR9 ISO S-4 20 bar	355	39,7	630	560	300	59.25
400	70.397.0400.09	400 SDR9 ISO S-4 20 bar	400	44,7	670	637	300	70.20
450	70.397.0450.09	450 SDR9 ISO S-4 20 bar	450	50,3	700	711	300	99.12
500	70.397.0500.09	500 SDR9 ISO S-4 20 bar	500	55,8	800	783	350	135.72
560	70.397.0560.09	560 SDR9 ISO S-4 20 bar	560	62,5	830	877	350	170.00
630	70.397.0630.09	630 SDR9 ISO S-4 20 bar	630	70,3	1.000	955	350	230.00