


Fittings with short Spigot

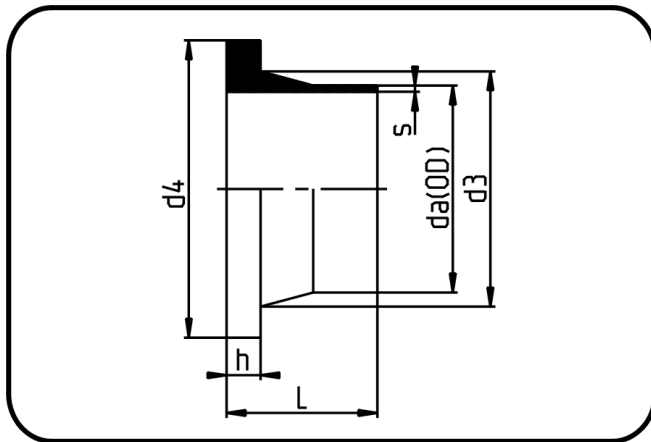

Code: 312

- Stub Flange DIN
- short spigot
- machined
- **Butt-welding**
- **PE 100-RC black**

Backing Rings please see Accessories.

Dimension	Code	Detail	da(OD) mm	s mm	L mm	d3 mm	d4 mm	h mm	Weight
800	70.312.0800.41	800X19,6 SDR41 ISO S-20	800	19,6	140	840	905	50	12.00
900	70.312.0900.41	900X22,0 SDR41 ISO S-20	900	22	150	944	1.005	55	16.00
1000	70.312.1000.41	1000X24,5 SDR41 ISO S-20	1.000	24,5	160	1.047	1.110	60	21.00
1200	70.312.1200.41	1200X29,4 SDR41 ISO S-20	1.200	29,4	190	1.245	1.330	70	34.00
1400	70.312.1400.41	1400X34,3 SDR41 ISO S-20	1.400	34,3	205	1.425	1.535	80	51.00
1600	70.312.1600.41	1600X39,2 SDR41 ISO S-20	1.600	39,2	230	1.655	1.760	95	78.00
1800	70.312.1800.41	1800X44 SDR41 ISO S-20	1.800	44	255	1.860	1.960	110	108.00
2000	70.312.2000.41	2000X48,9 SDR41 ISO S-20	2.000	48,9	280	2.070	2.170	130	153.00
2250	70.312.2250.41	2250X55 SDR41 ISO S-20	2.250	55	310	2.320	2.435	150	216.00
2500	70.312.2500.41	2500X61,2 SDR41 MOP 2,0bar	2.500	61,2	340	2.550	2.705	165	338.00
800	70.312.0800.33	800X24,5 SDR33 ISO S-16	800	24,5	140	840	905	50	15.60
900	70.312.0900.33	900X27,6 SDR33 ISO S-16	900	27,6	150	944	1.005	55	17.00
1000	70.312.1000.33	1000X30,6 SDR33 ISO S-16	1.000	30,6	160	1.047	1.110	60	22.00
1200	70.312.1200.33	1200X36,7 SDR33 ISO S-16	1.200	36,7	190	1.245	1.330	70	36.00
1400	70.312.1400.33	1400X42,9 SDR33 ISO S-16	1.400	42,9	205	1.425	1.535	80	53.00
1600	70.312.1600.33	1600X49 SDR33 ISO S-16	1.600	49	230	1.655	1.760	95	82.00
1800	70.312.1800.33	1800X55,1 SDR33 ISO S-16	1.800	55,1	255	1.860	1.960	110	113.00
2000	70.312.2000.33	2000X61,2 SDR33 ISO S-16	2.000	61,2	280	2.070	2.170	130	161.00
2250	70.312.2250.33	2250X68,9 SDR33 ISO S-16	2.250	68,9	310	2.320	2.435	150	226.00
2500	70.312.2500.33	2500X76,5 SDR33 MOP 2,5bar	2.500	76,5	340	2.550	2.705	165	348.00
800	70.312.0800.26	800X30,6 SDR26 ISO S-12,5	800	30,6	145	840	905	55	15.00
900	70.312.0900.26	900X34,4 SDR26 ISO S-12,5	900	34,4	155	944	1.005	60	23.80
1000	70.312.1000.26	1000X38,2 SDR26 ISO S-12,5	1.000	38,2	165	1.047	1.110	65	25.00
1200	70.312.1200.26	1200X45,9 SDR26 ISO	1.200	45,9	195	1.245	1.330	75	40.00

Dimension	Code	Detail	da(OD) mm	s mm	L mm	d3 mm	d4 mm	h mm	Weight
		S-12,5							
1400	70.312.1400.26	1400X53,5 SDR26 ISO S-12,5	1.400	53,5	210	1.425	1.535	85	60.00
1600	70.312.1600.26	1600X61,2 SDR26 ISO S-12,5	1.600	61,2	235	1.655	1.760	100	90.00
1800	70.312.1800.26	1800X68,8 SDR26 ISO S-12,5	1.800	68,8	270	1.860	1.960	125	133.00
2000	70.312.2000.26	2000X76,4 SDR26 ISO S-12,5	2.000	76,4	290	2.070	2.170	140	180.00
2250	70.312.2250.26	2250X86,0 SDR26 ISO S-12,5	2.250	86	315	2.320	2.435	155	245.00
2500	70.312.2500.26	2500X95,5 SDR26 MOP 3,2bar	2.500	95,5	350	2.550	2.705	175	367.00
800	70.312.0800.17	800X47,4 SDR17 ISO S-8	800	47,4	160	840	905	65	26.00
900	70.312.0900.17	900X53,3 SDR17 ISO S-8	900	53,3	165	944	1.005	70	25.00
1000	70.312.1000.17	1000X59,3 SDR17 ISO S-8	1.000	59,3	175	1.047	1.110	75	33.00
1200	70.312.1200.17	1200X71,1 SDR17 ISO S-8	1.200	71,1	210	1.245	1.330	90	54.00
1400	70.312.1400.17	1400X83,0 SDR17 ISO S-8	1.400	83	225	1.425	1.535	100	76.00
1600	70.312.1600.17	1600X94,8 SDR17 ISO S-8	1.600	94,8	245	1.655	1.760	110	109.00
1800	70.312.1800.17	1800X106,6 SDR17 ISO S-8	1.800	106,6	270	1.860	1.960	125	152.00
2000	70.312.2000.17	2000X118,5 SDR17 ISO S-8	2.000	118,5	290	2.070	2.170	140	204.00
2250	70.312.2250.17	2250X133,3 SDR17 ISO S-8	2.250	133,3	315	2.320	2.435	160	284.00
2500	70.312.2500.17	2500X148,1 SDR17 MOP 5,0bar	2.500	148,1	350	2.550	2.705	175	406.00