


Pipes

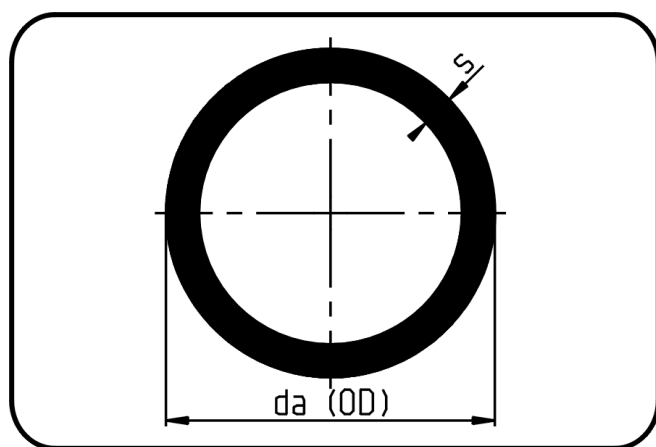

Code: 705

- Pipe 5m
- electrically conductive
- extruded
- PE 100-el black

Dimension	Code	Detail	da(OD) mm	s mm	Weight
110	28.705.0110.33	110X3,4 SDR33 ISO S-16	110	3,4	1.30
125	28.705.0125.33	125X3,9 SDR33 ISO S-16	125	3,9	1.67
160	28.705.0160.33	160X4,9 SDR33 ISO S-16	160	4,9	2.68
180	28.705.0180.33	180X5,5 SDR33 ISO S-16	180	5,5	3.39
200	28.705.0200.33	200X6,2 SDR33 ISO S-16	200	6,2	4.24
225	28.705.0225.33	225X6,9 SDR33 ISO S-16	225	6,9	5.28
250	28.705.0250.33	250X7,7 SDR33 ISO S-16	250	7,7	6.54
315	28.705.0315.33	315X9,7 SDR33 ISO S-16	315	9,7	10.40
400	28.705.0400.33	400X12,3 SDR33 ISO S-16	400	12,3	16.70
90	28.705.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	1.61
110	28.705.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	2.39
125	28.705.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	3.05
160	28.705.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	4.99
180	28.705.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	6.31
200	28.705.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	7.79
225	28.705.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	9.87
250	28.705.0250.17	250X14,8 SDR17 ISO S-8	250	14,8	12.10
315	28.705.0315.17	315X18,7 SDR17 ISO S-8	315	18,7	19.20
32	28.705.0032.11	32X3,0 SDR11 ISO S-5	32	3	0.31
40	28.705.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	0.48
50	28.705.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	0.74
63	28.705.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	1.16
75	28.705.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	1.62
90	28.705.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	2.35
110	28.705.0110.11	110X10,0 SDR11 ISO S-5	110	10	3.48
125	28.705.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	4.51
160	28.705.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	7.37
180	28.705.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	9.31

Dimension	Code	Detail	da(OD) mm	s mm	Weight
200	28.705.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	11.50
225	28.705.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	14.50
250	28.705.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	17.90
315	28.705.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	28.30