


## Elongated Fittings

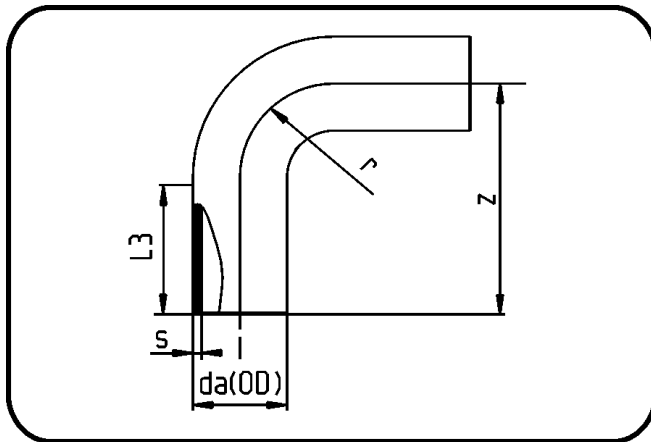

Code: 068

- **MULTI-Bend 90°**
- long spigot
- injection moulded
- **Butt + E-fusion-welding**
- **PPR grey**

| Dimension | Code           | Detail                 | da(OD)<br>mm | s<br>mm | z<br>mm | r<br>mm | L3<br>mm | Weight |
|-----------|----------------|------------------------|--------------|---------|---------|---------|----------|--------|
| 63        | 11.068.0063.17 | 63X3,8 SDR17 ISO S-8   | 63           | 3,8     | 129,5   | 63      | 66,5     | 0.18   |
| 75        | 11.068.0075.17 | 75X4,5 SDR17 ISO S-8   | 75           | 4,5     | 150     | 75      | 75       | 0.29   |
| 90        | 11.068.0090.17 | 90X5,4 SDR17 ISO S-8   | 90           | 5,4     | 168     | 90      | 76       | 0.47   |
| 110       | 11.068.0110.17 | 110X6,6 SDR17 ISO S-8  | 110          | 6,6     | 192     | 110     | 82       | 0.79   |
| 125       | 11.068.0125.17 | 125X7,4 SDR17 ISO S-8  | 125          | 7,4     | 218     | 125     | 92       | 1.17   |
| 140       | 11.068.0140.17 | 140X8,3 SDR17 ISO S-8  | 140          | 8,3     | 241     | 140     | 100      | 1.58   |
| 160       | 11.068.0160.17 | 160X9,5 SDR17 ISO S-8  | 160          | 9,5     | 261,5   | 160     | 100,5    | 2.23   |
| 180       | 11.068.0180.17 | 180X10,7 SDR17 ISO S-8 | 180          | 10,7    | 290,5   | 180     | 109      | 3.08   |
| 200       | 11.068.0200.17 | 200X11,9 SDR17 ISO S-8 | 200          | 11,9    | 318,5   | 200     | 118,5    | 4.03   |
| 225       | 11.068.0225.17 | 225X13,4 SDR17 ISO S-8 | 225          | 13,4    | 353     | 225     | 125      | 5.81   |
| 250       | 11.068.0250.17 | 250X14,8 SDR17 ISO S-8 | 250          | 14,8    | 389     | 250     | 135      | 7.04   |
| 280       | 11.068.0280.17 | 280X16,6 SDR17 ISO S-8 | 280          | 16,6    | 429     | 280     | 146      | 9.80   |
| 315       | 11.068.0315.17 | 315X18,7 SDR17 ISO S-8 | 315          | 18,7    | 475     | 315     | 158      | 14.00  |
| 20        | 11.068.0020.11 | 20X1,9 SDR11 ISO S-5   | 20           | 1,9     | 60      | 20      | 40       | 0.01   |
| 25        | 11.068.0025.11 | 25X2,3 SDR11 ISO S-5   | 25           | 2,3     | 68,5    | 25      | 42,5     | 0.02   |
| 32        | 11.068.0032.11 | 32X2,9 SDR11 ISO S-5   | 32           | 2,9     | 79      | 32      | 47       | 0.04   |
| 40        | 11.068.0040.11 | 40X3,7 SDR11 ISO S-5   | 40           | 3,7     | 92,5    | 40      | 52       | 0.07   |
| 50        | 11.068.0050.11 | 50X4,6 SDR11 ISO S-5   | 50           | 4,6     | 108,5   | 50      | 58,5     | 0.13   |
| 63        | 11.068.0063.11 | 63X5,8 SDR11 ISO S-5   | 63           | 5,8     | 129,5   | 63      | 66,5     | 0.25   |
| 75        | 11.068.0075.11 | 75X6,8 SDR11 ISO S-5   | 75           | 6,8     | 150     | 75      | 75       | 0.40   |
| 90        | 11.068.0090.11 | 90X8,2 SDR11 ISO S-5   | 90           | 8,2     | 168     | 90      | 76       | 0.66   |
| 110       | 11.068.0110.11 | 110X10,0 SDR11 ISO S-5 | 110          | 10      | 192     | 110     | 82       | 1.11   |
| 125       | 11.068.0125.11 | 125X11,4 SDR11 ISO S-5 | 125          | 11,4    | 218     | 125     | 92       | 1.64   |
| 140       | 11.068.0140.11 | 140X12,7 SDR11 ISO S-5 | 140          | 12,7    | 241     | 140     | 100      | 2.24   |
| 160       | 11.068.0160.11 | 160X14,6 SDR11 ISO S-5 | 160          | 14,6    | 261,5   | 160     | 100,5    | 3.16   |
| 180       | 11.068.0180.11 | 180X16,4 SDR11 ISO S-5 | 180          | 16,4    | 290,5   | 180     | 109      | 4.33   |
| 200       | 11.068.0200.11 | 200X18,2 SDR11 ISO S-5 | 200          | 18,2    | 318,5   | 200     | 118,5    | 5.80   |
| 225       | 11.068.0225.11 | 225X20,5 SDR11 ISO S-5 | 225          | 20,5    | 353     | 225     | 125      | 8.15   |
|           |                |                        |              |         |         |         |          |        |

| Dimension | Code           | Detail                 | da(OD)<br>mm | s<br>mm | z<br>mm | r<br>mm | L3<br>mm | Weight |
|-----------|----------------|------------------------|--------------|---------|---------|---------|----------|--------|
| 250       | 11.068.0250.11 | 250X22,7 SDR11 ISO S-5 | 250          | 22,7    | 389     | 250     | 135      | 10.40  |
| 280       | 11.068.0280.11 | 280X25,4 SDR11 ISO S-5 | 280          | 25,4    | 429     | 280     | 146      | 14.22  |
| 315       | 11.068.0315.11 | 315X28,6 SDR11 ISO S-5 | 315          | 28,6    | 475     | 315     | 158      | 19.82  |