


Fittings with short Spigot

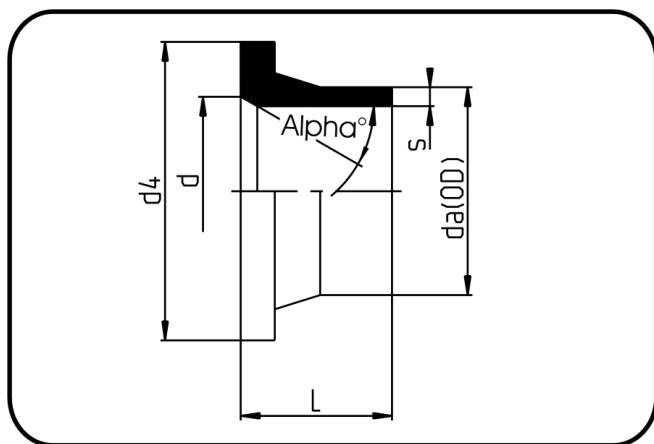

Code: 012.9

- **Chamfered Stub Flange DIN**
- for butterfly valves
- with identification groove
- injection moulded+chamfered
- **Butt-welding**
- **PPR grey**

Backing Rings please see Accessories.

Dimension	Code	Detail	da(OD) mm	s mm	L mm	d mm	d4 mm	alph [°]	Weight
110	11.012.9110.17	110X6,6 SDR17 ISO S-8	110	6,6	80	100	158	30	0.35
140	11.012.9140.17	140X8,3 SDR17 ISO S-8	140	8,3	92	125	188	30	0.52
160	11.012.9160.17	160X9,5 SDR17 ISO S-8	160	9,5	92	150	212	30	0.65
200	11.012.9200.17	200X11,9 SDR17 ISO S-8	200	11,9	110	210	268	30	1.32
225	11.012.9225.17	225X13,4 SDR17 ISO S-8	225	13,4	113	210	268	30	1.38
250	11.012.9250.17	250X14,8 SDR17 ISO S-8	250	14,8	132	255	320	25	2.14
280	11.012.9280.17	280X16,6 SDR17 ISO S-8	280	16,6	128	255	320	25	2.18
315	11.012.9315.17	315X18,7 SDR17 ISO S-8	315	18,7	136	305	370	25	2.96
355	11.012.9355.17	355X21,1 SDR17 ISO S-8	355	21,1	150	338	430	20	4.20
400	11.012.9400.17	400X23,7 SDR17 ISO S-8	400	23,7	155	378	482	30	5.75
450	11.012.9450.17	450X26,7 SDR17 ISO S-8	450	26,7	170	426	585	22	10.40
500	11.012.9500.17	500X29,7 SDR17 ISO S-8	500	29,7	175	480	585	25	10.00
630	11.012.9630.17	630X37,4 SDR17 ISO S-8	630	37,4	180	595	685	25	13.40
110	11.012.9110.11	110X10,0 SDR11 ISO S-5	110	10	82	100	158	30	0.44
140	11.012.9140.11	140X12,7 SDR11 ISO S-5	140	12,7	92	125	188	30	0.74
160	11.012.9160.11	160X14,6 SDR11 ISO S-5	160	14,6	92	150	212	30	0.92
180	11.012.9180.11	180X16,4 SDR11 ISO S-5	180	16,4	93	150	212	30	1.00
200	11.012.9200.11	200X18,2 SDR11 ISO S-5	200	18,2	114	210	268	30	1.74
225	11.012.9225.11	225X20,5 SDR11 ISO S-5	225	20,5	113	210	268	30	1.86
250	11.012.9250.11	250X22,7 SDR11 ISO S-5	250	22,7	130	255	320	25	2.79
280	11.012.9280.11	280X25,4 SDR11 ISO S-5	280	25,4	128	255	320	25	2.94
315	11.012.9315.11	315X28,6 SDR11 ISO S-5	315	28,6	136	301	370	22	3.95
355	11.012.9355.11	355X32,2 SDR11 ISO S-5	355	32,2	150	338	430	30	5.96
400	11.012.9400.11	400X36,3 SDR11 ISO S-5	400	36,3	155	378	482	30	7.92
450	11.012.9450.11	450X40,9 SDR11 ISO S-5	450	40,9	165	440	585	22	13.20
500	11.012.9500.11	500X45,4 SDR11 ISO S-5	500	45,4	175	480	585	25	13.20