


Fittings with short Spigot

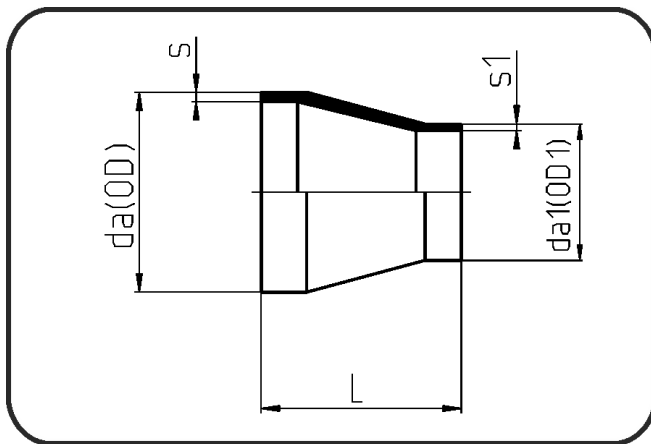

Code: 317

- Reducer concentric
- short spigot
- machined
- Butt + IR-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
450/225	11.317.4522.17	450/225 SDR17 ISO S-8	450	225	26,7	180	13,4	6.83
500/225	11.317.5022.17	500/225 SDR17 ISO S-8	500	225	29,7	200	13,4	9.34
500/250	11.317.5025.17	500/250 SDR17 ISO S-8	500	250	29,7	190	13,4	10.12
500/280	11.317.5028.17	500/280 SDR17 ISO S-8	500	280	29,7	175	16,6	8.52
500/315	11.317.5031.17	500/315 SDR17 ISO S-8	500	315	29,7	165	18,7	8.30
500/355	11.317.5035.17	500/355 SDR17 ISO S-8	500	355	29,7	145	21,1	7.20
500/400	11.317.5040.17	500/400 SDR17 ISO S-8	500	400	29,7	130	23,7	7.20
630/200	11.317.6320.17	630/200 SDR17 ISO S-8	630	200	34,7	260	11,9	18.50
630/250	11.317.6325.17	630/250 SDR17 ISO S-8	630	250	34,7	245	14,8	19.90
630/315	11.317.6331.17	630/315 SDR17 ISO S-8	630	315	37,4	225	18,7	16.80
630/400	11.317.6340.17	630/400 SDR17 ISO S-8	630	400	37,4	190	23,7	15.00
355/225	11.317.3522.11	355/225 SDR11 ISO S-5	355	225	32,2	135	20,5	4.05
355/250	11.317.3525.11	355/250 SDR11 ISO S-5	355	250	32,2	125	22,7	4.20
355/280	11.317.3528.11	355/280 SDR11 ISO S-5	355	280	32,2	115	25,4	3.60
355/315	11.317.3531.11	355/315 SDR11 ISO S-5	355	315	32,2	100	28,6	3.62
400/225	11.317.4022.11	400/225 SDR11 ISO S-5	400	225	36,3	150	20,5	6.21
400/250	11.317.4025.11	400/250 SDR11 ISO S-5	400	250	36,3	145	22,7	6.00
400/280	11.317.4028.11	400/280 SDR11 ISO S-5	400	280	36,3	130	25,4	5.54
400/315	11.317.4031.11	400/315 SDR11 ISO S-5	400	315	36,3	125	28,6	5.84
400/355	11.317.4035.11	400/355 SDR11 ISO S-5	400	355	36,3	110	32,2	4.40
450/200	11.317.4520.11	450/200 SDR11 ISO S-5	450	200	40,9	180	18,2	8.97
450/225	11.317.4522.11	450/225 SDR11 ISO S-5	450	225	40,9	170	20,5	8.20
450/280	11.317.4528.11	450/280 SDR11 ISO S-5	450	280	40,9	150	25,4	8.20
450/400	11.317.4540.11	450/400 SDR11 ISO S-5	450	400	40,9	110	36,3	6.40
500/225	11.317.5022.11	500/225 SDR11 ISO S-5	500	225	45,4	195	20,5	13.10
500/280	11.317.5028.11	500/280 SDR11 ISO S-5	500	280	45,4	180	25,4	11.40
500/315	11.317.5031.11	500/315 SDR11 ISO S-5	500	315	45,4	165	28,6	10.60
500/355	11.317.5035.11	500/355 SDR11 ISO S-5	500	355	45,4	150	32,2	9.60

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
500/400	11.317.5040.11	500/400 SDR11 ISO S-5	500	400	45,4	135	36,3	9.00
630/400	11.317.6340.11	630/400 SDR11 ISO S-5	630	400	57,2	190	36,3	19.40
630/500	11.317.6350.11	630/500 SDR11 ISO S-5	630	500	57,2	160	45,4	17.80
630/560	11.317.6356.11	630/560 SDR11 ISO S-5	630	560	57,2	140	50,8	13.80