


## Segmented Fittings

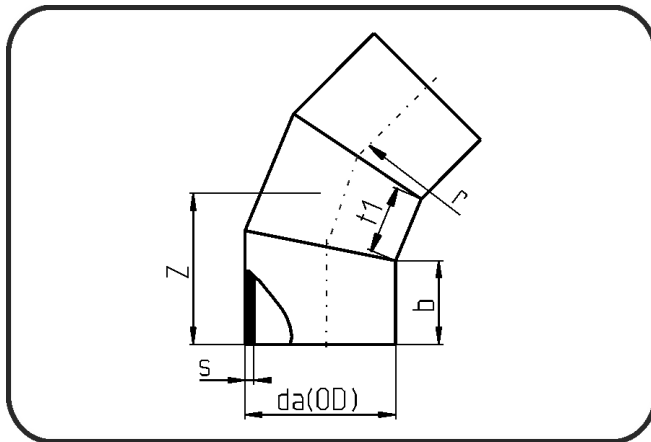

Code: 330

- Bend 45°
- segmented/inside bead removed
- derating factor 0.8
- Butt-welding
- PPH grey

| Dimension | Code           | Detail                     | da(OD)<br>mm | s<br>mm | r<br>mm | b<br>mm | t1<br>mm | z<br>mm | Weight |
|-----------|----------------|----------------------------|--------------|---------|---------|---------|----------|---------|--------|
| 560       | 12.330.0560.41 | 560X13,7 SDR41 ISO S-20    | 560          | 13,7    | 883     | 350     | 223      | 587     | 26.40  |
| 630       | 12.330.0630.41 | 630X15,4 SDR41 ISO S-20    | 630          | 15,4    | 918     | 350     | 251      | 616     | 34.90  |
| 710       | 12.330.0710.41 | 710X17,4 SDR41 ISO S-20    | 710          | 17,4    | 1.110   | 400     | 282,5    | 700     | 49.60  |
| 800       | 12.330.0800.41 | 800X19,6 SDR41 ISO S-20    | 800          | 19,6    | 1.155   | 400     | 318      | 738     | 66.20  |
| 900       | 12.330.0900.41 | 900X22,0 SDR41 ISO S-20    | 900          | 22      | 1.330   | 400     | 358      | 780     | 88.20  |
| 1000      | 12.330.1000.41 | 1000X24,5 SDR41 ISO S-20   | 1.000        | 24,5    | 1.380   | 500     | 398      | 923     | 129.00 |
| 1200      | 12.330.1200.41 | 1200X29,4 SDR41 ISO S-20   | 1.200        | 29,4    | 1.480   | 500     | 477,5    | 1.007   | 203.00 |
| 560       | 12.330.0560.33 | 560X17,2 SDR33 ISO S-16    | 560          | 17,2    | 883     | 350     | 223      | 587     | 32.80  |
| 630       | 12.330.0630.33 | 630X19,3 SDR33 ISO S-16    | 630          | 19,3    | 918     | 350     | 251      | 616     | 43.40  |
| 710       | 12.330.0710.33 | 710X21,8 SDR33 ISO S-16    | 710          | 21,8    | 1.110   | 400     | 282,5    | 700     | 61.70  |
| 800       | 12.330.0800.33 | 800X24,5 SDR33 ISO S-16    | 800          | 24,5    | 1.155   | 400     | 318      | 738     | 82.20  |
| 900       | 12.330.0900.33 | 900X27,6 SDR33 ISO S-16    | 900          | 27,6    | 1.330   | 400     | 358      | 780     | 110.00 |
| 1000      | 12.330.1000.33 | 1000X30,6 SDR33 ISO S-16   | 1.000        | 30,6    | 1.380   | 500     | 398      | 923     | 160.00 |
| 1200      | 12.330.1200.33 | 1200X36,7 SDR33 ISO S-16   | 1.200        | 36,7    | 1.800   | 500     | 477,5    | 1.007   | 251.00 |
| 560       | 12.330.0560.26 | 560X21,4 SDR26 ISO S-12,5  | 560          | 21,4    | 883     | 350     | 223      | 587     | 40.40  |
| 630       | 12.330.0630.26 | 630X24,1 SDR26 ISO S-12,5  | 630          | 24,1    | 918     | 350     | 251      | 616     | 53.70  |
| 710       | 12.330.0710.26 | 710X27,2 SDR26 ISO S-12,5  | 710          | 27,2    | 1.110   | 400     | 283      | 700     | 76.20  |
| 800       | 12.330.0800.26 | 800X30,6 SDR26 ISO S-12,5  | 800          | 30,6    | 1.155   | 400     | 318      | 738     | 102.00 |
| 900       | 12.330.0900.26 | 900X34,4 SDR26 ISO S-12,5  | 900          | 34,4    | 1.330   | 400     | 358      | 780     | 136.00 |
| 560       | 12.330.0560.17 | 560X31,7 SDR17,6 ISO S-8,3 | 560          | 31,7    | 883     | 350     | 223      | 587     | 58.80  |
| 630       | 12.330.0630.17 | 630X35,7 SDR17,6 ISO S-8,3 | 630          | 35,7    | 918     | 350     | 251      | 616     | 76.50  |
| 710       | 12.330.0710.17 | 710X40,2 SDR17,6 ISO S-8,3 | 710          | 40,2    | 1.110   | 400     | 283      | 700     | 110.00 |
| 800       | 12.330.0800.17 | 800X45,3 SDR17,6 ISO S-8,3 | 800          | 47,4    | 1.200   | 400     | 318      | 738     | 148.00 |