


## Fittings with short Spigot

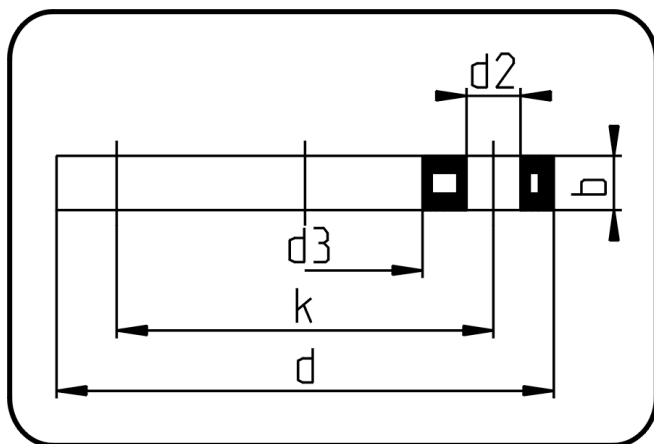

Code: 014

- Backing Ring DIN
- steel insert/for stub flange
- flame retardant & el-conduct.
- injection moulded+drilled PN10
- **Flange connection**
- **PPs-el black**

| Dimension | Code           | Detail           | da(OD)<br>mm | d<br>mm | d2<br>mm | d3<br>mm | b<br>mm | k<br>mm | Weight |
|-----------|----------------|------------------|--------------|---------|----------|----------|---------|---------|--------|
| 200       | 19.014.0200.11 | 200 - MOP 16 bar | 200          | 340     | 22       | 235      | 25      | 295     | 3.62   |
| 225       | 19.014.0225.11 | 225 - MOP 16 bar | 225          | 340     | 22       | 238      | 25      | 295     | 3.58   |
| 250       | 19.014.0250.11 | 250 - MOP 16 bar | 250          | 409     | 22       | 288      | 30      | 350     | 6.48   |
| 315       | 19.014.0315.11 | 315 - MOP 16 bar | 315          | 463     | 23       | 338      | 34      | 400     | 9.84   |