


## Segmented Fittings

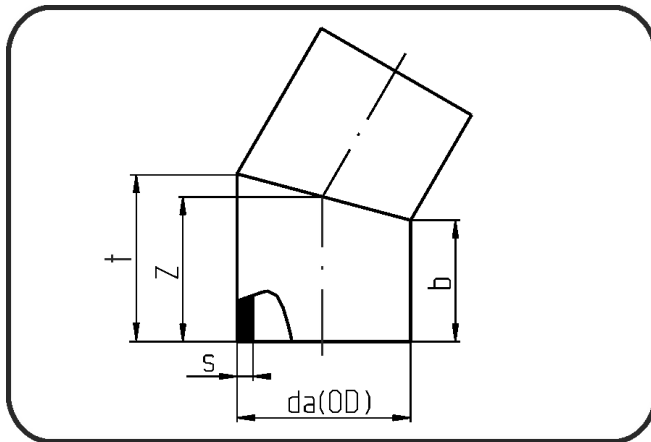

Code: 329

- Bend 30°
- segmented
- derating factor 0.8
- Butt-welding
- PE 100-RC black

From dim. 800 availability + delivery time on req.

| Dimension | Code           | Detail                     | da(OD)<br>mm | s<br>mm | b<br>mm | z<br>mm | Weight |
|-----------|----------------|----------------------------|--------------|---------|---------|---------|--------|
| 560       | 70.329.0560.41 | 560X13,7 SDR41 ISO S-20    | 560          | 13,7    | 350     | 425     | 20.30  |
| 630       | 70.329.0630.41 | 630X15,4 SDR41 ISO S-20    | 630          | 15,4    | 350     | 434     | 25.60  |
| 710       | 70.329.0710.41 | 710X17,4 SDR41 ISO S-20    | 710          | 17,4    | 400     | 495     | 37.90  |
| 800       | 70.329.0800.41 | 800X19,6 SDR41 ISO S-20    | 800          | 19,6    | 400     | 507     | 59.10  |
| 900       | 70.329.0900.41 | 900X22,0 SDR41 ISO S-20    | 900          | 22      | 400     | 521     | 76.10  |
| 1000      | 70.329.1000.41 | 1000X24,5 SDR41 ISO S-20   | 1.000        | 24,5    | 500     | 634     | 96.00  |
| 1200      | 70.329.1200.41 | 1200X29,4 SDR41 ISO S-20   | 1.200        | 29,4    | 500     | 661     | 144.00 |
| 560       | 70.329.0560.33 | 560X17,2 SDR33 ISO S-16    | 560          | 17,2    | 350     | 425     | 24.70  |
| 630       | 70.329.0630.33 | 630X19,3 SDR33 ISO S-16    | 630          | 19,3    | 350     | 434     | 31.80  |
| 710       | 70.329.0710.33 | 710X21,8 SDR33 ISO S-16    | 710          | 21,8    | 400     | 495     | 47.20  |
| 800       | 70.329.0800.33 | 800X24,5 SDR33 ISO S-16    | 800          | 24,5    | 400     | 507     | 73.30  |
| 900       | 70.329.0900.33 | 900X27,6 SDR33 ISO S-16    | 900          | 27,6    | 400     | 521     | 95.00  |
| 1000      | 70.329.1000.33 | 1000X30,6 SDR33 ISO S-16   | 1.000        | 30,6    | 500     | 634     | 119.00 |
| 1200      | 70.329.1200.33 | 1200X36,7 SDR33 ISO S-16   | 1.200        | 36,7    | 500     | 661     | 178.00 |
| 560       | 70.329.0560.26 | 560X21,4 SDR26 ISO S-12,5  | 560          | 21,4    | 350     | 425     | 30.40  |
| 630       | 70.329.0630.26 | 630X24,1 SDR26 ISO S-12,5  | 630          | 24,1    | 350     | 434     | 39.40  |
| 710       | 70.329.0710.26 | 710X27,2 SDR26 ISO S-12,5  | 710          | 27,2    | 400     | 495     | 58.40  |
| 800       | 70.329.0800.26 | 800X30,6 SDR26 ISO S-12,5  | 800          | 30,6    | 400     | 507     | 90.70  |
| 900       | 70.329.0900.26 | 900X34,4 SDR26 ISO S-12,5  | 900          | 34,4    | 400     | 521     | 98.30  |
| 1000      | 70.329.1000.26 | 1000X38,2 SDR26 ISO S-12,5 | 1.000        | 38,2    | 500     | 634     | 148.00 |
| 1200      | 70.329.1200.26 | 1200X45,9 SDR26 ISO S-12,5 | 1.200        | 45,9    | 500     | 661     | 222.00 |
| 560       | 70.329.0560.17 | 560X33,2 SDR17 ISO S-8     | 560          | 33,2    | 350     | 425     | 46.00  |
| 630       | 70.329.0630.17 | 630X37,4 SDR17 ISO S-8     | 630          | 37,4    | 350     | 434     | 59.60  |
| 710       | 70.329.0710.17 | 710X42,1 SDR17 ISO S-8     | 710          | 42,1    | 400     | 495     | 88.10  |
| 800       | 70.329.0800.17 | 800X47,4 SDR17 ISO S-8     | 800          | 47,4    | 400     | 507     | 115.00 |

| Dimension | Code           | Detail                   | da(OD)<br>mm | s<br>mm | b<br>mm | z<br>mm | Weight |
|-----------|----------------|--------------------------|--------------|---------|---------|---------|--------|
| 900       | 70.329.0900.17 | 900X53,3 SDR17 ISO S-8   | 900          | 53,3    | 400     | 521     | 177.00 |
| 1000      | 70.329.1000.17 | 1000X59,3 SDR17 ISO S-8  | 1.000        | 59,3    | 500     | 634     | 223.00 |
| 1200      | 70.329.1200.17 | 1200X71,1 SDR17 ISO S-8  | 1.200        | 71,1    | 500     | 661     | 336.00 |
| 560       | 70.329.0560.11 | 560X50,8 SDR11 ISO S-5   | 560          | 50,8    | 350     | 425     | 71.70  |
| 630       | 70.329.0630.11 | 630X57,2 SDR11 ISO S-5   | 630          | 57,2    | 350     | 434     | 87.40  |
| 710       | 70.329.0710.11 | 710X64,5 SDR11 ISO S-5   | 710          | 64,5    | 400     | 495     | 130.00 |
| 800       | 70.329.0800.11 | 800X72,6 SDR11 ISO S-5   | 800          | 72,6    | 400     | 507     | 203.00 |
| 900       | 70.329.0900.11 | 900X81,7 SDR11 ISO S-5   | 900          | 81,7    | 400     | 521     | 262.00 |
| 1000      | 70.329.1000.11 | 1000X90,8 SDR11 ISO S-5  | 1.000        | 90,8    | 500     | 634     | 330.00 |
| 1200      | 70.329.1200.11 | 1200X108,9 SDR11 ISO S-5 | 1.200        | 108,9   | 500     | 661     | 496.00 |